



Dongguan Minox Industry Co.,Ltd

东莞市敏欣实业有限公司

Product Brochure
产品目录



Push Pull Exhaust Fan



Fiberglass Exhaust Fan



3 Blade Exhaust Fan



Fiberglass Cone Fan



Butterfly Cone Fan

CONTENTS

目录

01.

Company Profile
公司简介

02.

Exhaust Fan Specifications
负压风机规格

03.

Exhaust Fan Features
负压风机特点

04.

Air Cooler Specifications
环保空调规格



01

Company profile / 公司简介

Company profile / 公司简介

About us

Dongguan Minxin Industry Co., Ltd. is a professional manufacturer of ventilation and cooling equipment, integrating professional design, production, sales and after-sales service. It is a specialized manufacturer of negative pressure fans, evaporative air cooler and industrial environmental protection cooling equipment. The company was established in 2015. Its sales and warehousing center is located in Changping Town, Dongguan City, covering an area of 10,000 square meters. The factory assembly and production base is located in Heyuan City, Guangdong Province, covering an area of 80,000 square meters. It is equipped with advanced automated equipment and fully automatic production lines in the industry, Upgrade from "Made in China" to "Intelligently Made in China". Currently, it has more than 200 employees. The newly upgraded production mode not only improves the quality but also increases the efficiency. From raw materials to finished products, all are produced by our factory, forming a good industrial chain. After years of development, Minxin Industrial has rapidly grown into an environmental protection technology company with advanced technical strength. The company has passed ISO9001 certification, and its products have passed CE, ROHS, etc. Currently, its products have been sold to more than 80 countries and regions around the world and have been widely recognized by customers.



东莞市敏欣实业有限公司是一家专业生产通风降温厂家，集专业化设计、生产、销售、售后服务于一体的专业负压风机，工业环保空调生产厂家。公司成立于2015年，销售及仓储中心位于东莞市常平镇占地10000m²，厂房装配及生产基地位于广东省河源市占地80000m²，配备行业先进自动化设备和全自动生产流水线，由中国制造升级到“中国智造”现有员工200余名。全新升级的生产模式，不仅提高了品质还增加了效率。从材料到成品均由本厂生产，形成了良好的产业链，经过多年的发展，敏欣实业已迅速成长为具有先进技术实力的环保技术公司。公司已通过ISO9001认证，产品通过CE、ROHS等，目前产品已销往全球80多个国家和地区，并获得客户的广泛认可。

Production Facilities / 生产设施



Plastic Injection Workshop
注塑车间



Steel coil sliding and cutting
line, steeling pipe cutting line
激光切割生产线



Motor Copper Coil Winding Line
电机铜线圈绕线机




Aluminum Die Cast Tooling & Casting
铝压铸模 & 铸件



Motor Assembly Workshop
电机装配车间



Fan Parts CNC Machining
负压风机零件数控加工

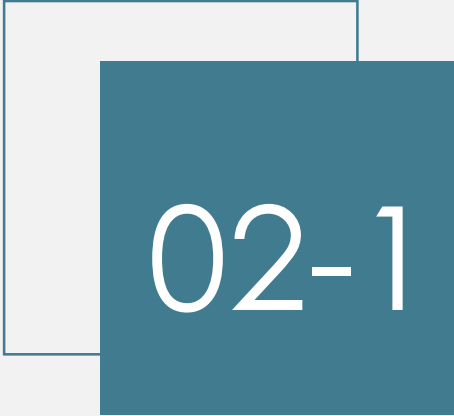

02-1

New Arrival Box Type BLDC Exhaust Fan Specifications

新品上市
箱式 直流无刷负压风机规格

BLDC EXHAUST FAN 直流无刷负压风机

Product Performance Parameter 产品性能参数

Model 型号	Speed regulation 速调档	A.M.P 电流	Voltage 电压	Power 功率	Frequency 频率	Airflow 风量	Speed 风速	Rotating Speed 转速	Noise 噪音
MX-900#	1st gear	A	220V	130W	50HZ	4080m3/h	2.5 m/s	155 rpm	45 dB
	2nd gear	A	220V	210W	50HZ	9467 m3/h	5.8 m/s	233 rpm	55 dB
	3rd gear	A	220V	305W	50HZ	10609 m3/h	6.5 m/s	466 rpm	60 dB



BLDC EXHAUST FAN

直流无刷负压风机

Product Performance Parameter 产品性能参数

Model 型号	Speed regulation 速调档	A.M.P 电流	Voltage 电压	Power 功率	Frequency 频率	Airflow 风量	Speed 风速	Rotating Speed 转速	Noise 噪音
MX-1000#	1st gear	0.96	220V	102W	50HZ	7524m3/h	3.6m/s	136 rpm	68dB
	2nd gear	1.47	220V	256W	50HZ	11704 m3/h	5.6 m/s	181 rpm	70 dB
	3rd gear	2.38	220V	265W	50HZ	14421 m3/h	6.9 m/s	272 rpm	76 dB
	4th gear	3.5	220V	392W	50HZ	17974 m3/h	8.6 m/s	544 rpm	78 dB



BLDC EXHAUST FAN 直流无刷负压风机

Product Performance Parameter 产品性能参数

Model 型号	Speed regulation 速调档	A.M.P 电流	Voltage 电压	Power 功率	Frequency 频率	Airflow 风量	Speed 风速	Rotating Speed 转速	Noise 噪音
MX-1220#	1st gear	1.6 A	220V	145W	50HZ	13844m3/h	4.2m/s	111 rpm	70dB
	2nd gear	2.6 A	220V	251W	50HZ	20107 m3/h	6.1 m/s	148 rpm	80 dB
	3rd gear	3.6 A	220V	398W	50HZ	24721 m3/h	7.5 m/s	222 rpm	80 dB
	4th gear	5.0 A	220V	589W	50HZ	28677 m3/h	8.7 m/s	445 rpm	82 dB



BLDC EXHAUST FAN 直流无刷负压风机

Product Performance Parameter 产品性能参数

Model 型号	Speed regulation 速调档	A.M.P 电流	Voltage 电压	Power 功率	Frequency 频率	Airflow 风量	Speed 风速	Rotating Speed 转速	Noise 噪音
MX-1380#	1st gear	1.8 A	220V	200W	50HZ	15200m3/h	3.5m/s	103 rpm	61 dB
	2nd gear	3.2 A	220V	375W	50HZ	24333 m3/h	5.6 m/s	138 rpm	64 dB
	3rd gear	5.0 A	220V	585W	50HZ	31720 m3/h	7.3 m/s	207 rpm	70 dB
	4th gear	7.1 A	220V	850W	50HZ	39107 m3/h	9.0 m/s	413 rpm	80 dB



BLDC EXHAUST FAN 直流无刷负压风机

Product Performance Parameter 产品性能参数

Model 型号	Speed regulation 速调档	A.M.P 电流	Voltage 电压	Power 功率	Frequency 频率	Airflow 风量	Speed 风速	Rotating Speed 转速	Noise 噪音
MX-1530#	1st gear	2.0 A	220V	185W	50HZ	24922 m3/h	4.5m/s	86 rpm	65 dB
	2nd gear	3.1 A	220V	330W	50HZ	31572 m3/h	5.7 m/s	115 rpm	64 dB
	3rd gear	4.8 A	220V	522W	50HZ	37664 m3/h	6.8 m/s	172 rpm	70 dB
	4th gear	6.2 A	220V	850W	50HZ	43757 m3/h	7.9 m/s	344 rpm	75 dB



BLDC EXHAUST FAN 直流无刷负压风机

Features 特点



stainless steel shutter:
anti-corrosion and anti-rust
The fan uses a heavy hammer
high-strength nylon swing
opening
device to make the shutter
open and close flexibly and
stably

防腐防锈的不锈钢百叶
重锤式风机，采用高强度尼龙摆式开启
装置，使百叶开&关，灵活，稳定



Stainless steel blade
with large airflow,
not deformed

大风量，不易变形的
不锈钢风叶



The brushless DC motor, with the design
of the fan blades, making the wind
spread more evenly and the indoor
ventilation smoother, four-speed
control, saving ineffective loss

采用直流无刷电机，配合扇叶设计，使风
力扩散更均匀，室内换气更顺畅，四档调
速，节省无效损耗




DC brushless
frequency motor
Four-speed
control to adjust
the wind speed

直流无刷变频电机
4档调节风速

BLDC EXHAUST FAN 直流无刷负压风机

Features 特点

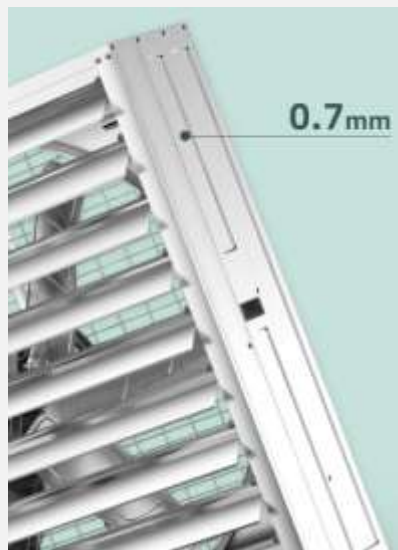

0.7mm

Thickened galvanized frame making the fan's body more stronger, the transportation is safer, more beautiful, and it is not easy to rust

加厚镀锌框架
使风机机身更坚固，运输更安全，更美观，不易生锈



Widened and thickened aluminum wheel,
Wear-resistant and corrosion-resistant

加宽加厚铝轮，耐磨耐腐蚀



High density protective grill 高密度防护网



Widened and thickened belt

Sanlux B belt,
Durable, long life

加宽加厚皮带
三力士B型皮带，经久耐用



four-speed control can be adjustable,
Support Bluetooth or WIFI for controller

四档可调速，
控制器支持蓝牙或 WIFI

	DC Exhaust Fan	Standard Exhaust Fan
size	1380*1380*350mm	1380*1380*350mm
Air flow	44500m ³ /h	44500m ³ /h
Speed	445r/min	445r/min
Power	0.22KW/h	1.1KW/h
Applicable area	100-150m ²	100-150m ²



02-2

Gravity Hammer Box Fan Specifications


重锤箱式
负压风机规格




EXHAUST FAN 负压风机

Product Performance Parameter 产品性能参数

Model 型号	Size 尺寸(mm)	Diameter 直径 (inch)	Air Volume 风量(m3/h)	CFM 立方英尺/ 分钟	Noise 噪音 (db)	Fan Speed 风速 (r/m)	Motor Power 功率 (kw)	Rated Voltage 额定电压
MX-1750#	1750*1750*400	62	68000	40000	<70	400	1.8	380v
MX-1530#	1530*1530*400	52	57000	32800	<70	450	1.5	380V
MX-1380#	1380*1380*350	50	44500	26000	<65	450	1.1	380V
MX-1220#	1220*1220*350	40	37000	22000	<60	450	0.75	380V
MX-1100#	1100*1100*350	36	34000	20000	<60	450	0.55	380V
MX-1060#	1060*1060*350	36	32000	19000	<60	450	0.55	380V
MX-1000#	1000*1000*350	32	30000	17650	<60	450	0.55	380V
MX-900#	900*900*350	30	27000	16000	<55	450	0.37	380V
MX-800#	800*800*300	24	13000	8000	<60	960	0.37	380V
MX-700#	700*700*300	22	10000	6000	<60	960	0.25	380V
MX-600#	600*600*300	20	8000	4700	<55	960	0.25	380V
MX-500#	500*500*300	16	5000	3000	<55	1400	0.25	380V
MX-400#	400*400*300	12	2500	1500	<55	1400	0.25	380V
MX-300#	300*300*200	8	1500	1200	<50	2200	0.18	220V
MX-200#	200*200*170	6	1000	588	<60	2200	0.15	220V

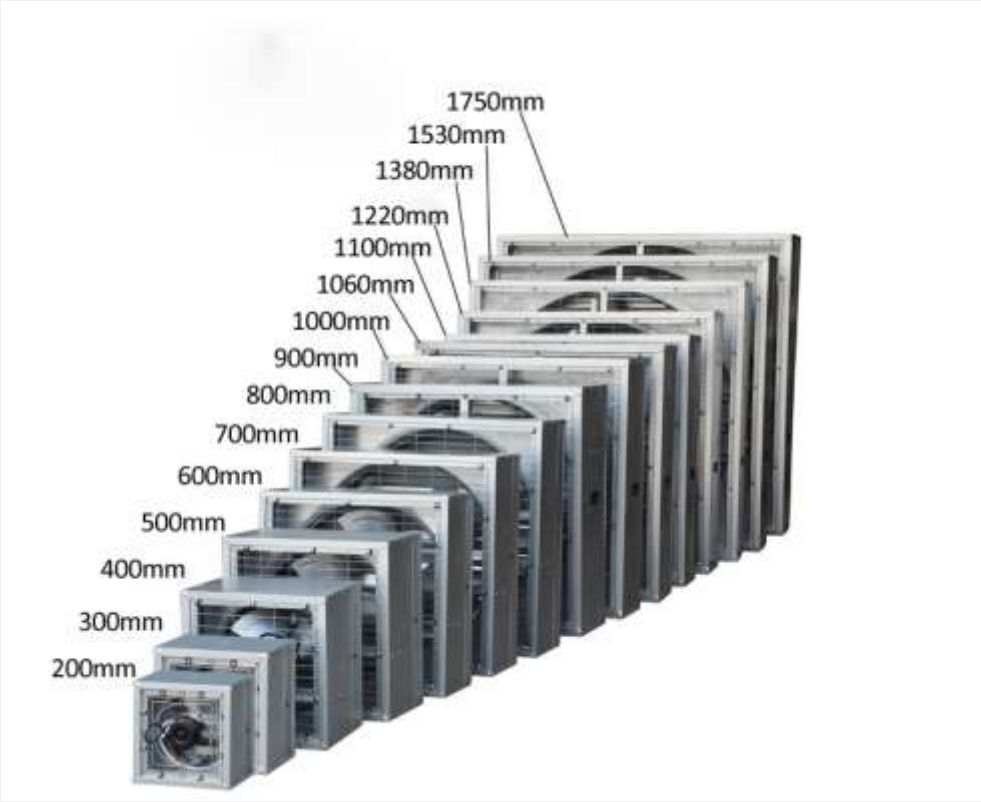

PRODUCT SPECIFICATIONS 产品规格


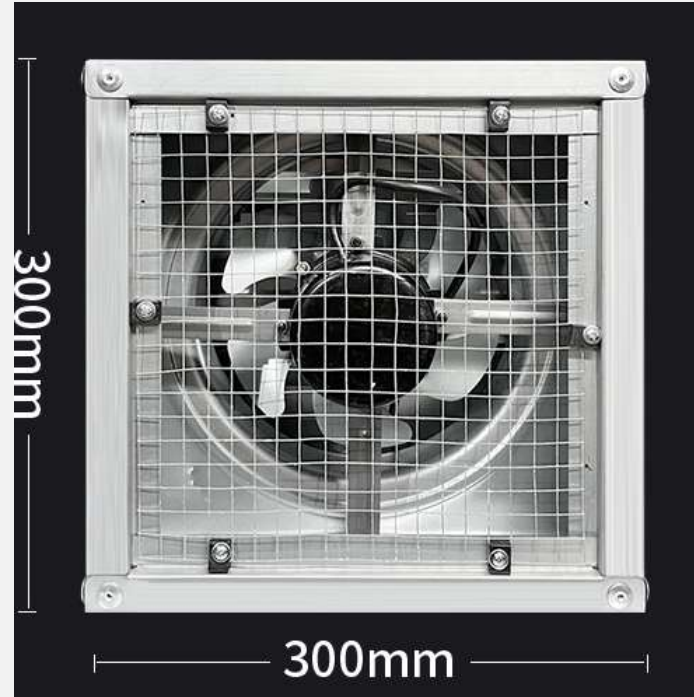


Model 型号	Dimension 尺寸(mm)	Dimension 尺寸 (inch)	Diameter 直径 (inch)	Fan Air Volume 风量	Fan Operation Noise 噪音	Power 功率
Standard	300x300x200mm	12" x 12" X7.9	8	(1500m³/h, 1200CFM)	less than 50 dB	150 W

Note: the voltage and frequency can be customized

备注：电压、频率可定制

PRODUCT SPECIFICATIONS

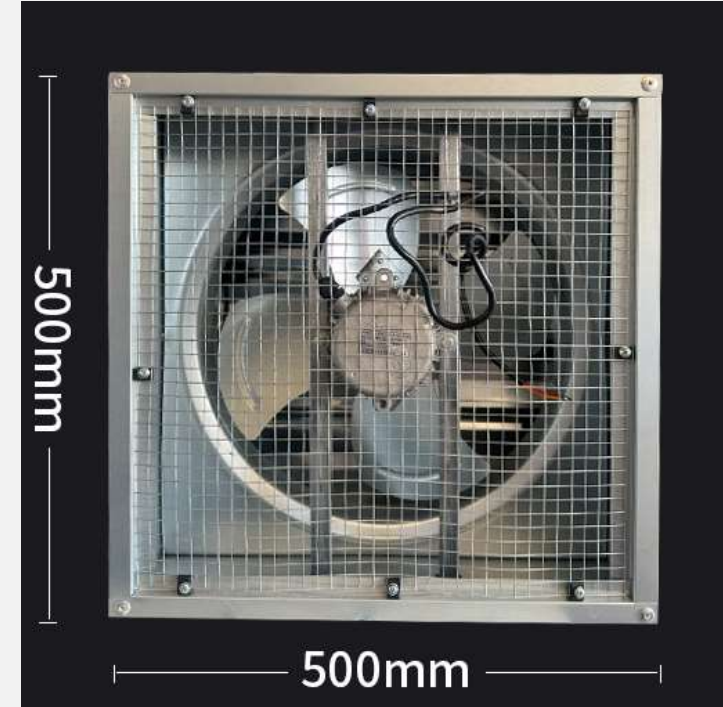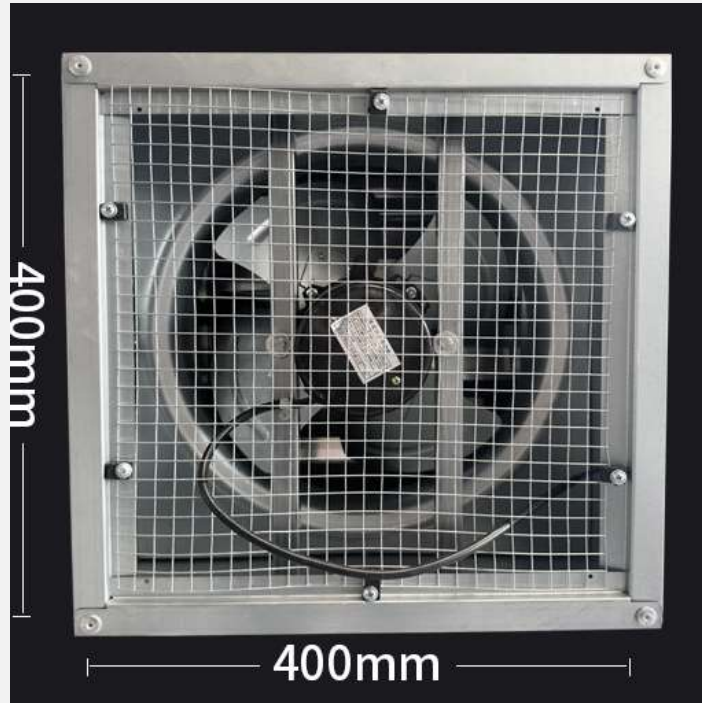



Model 型号	Dimension 尺寸(mm)	Dimension 尺寸 (inch)	Diameter 直径 (inch)	Fan Air Volume 风量	Fan Operation Noise 噪音	Power 功率
Standard	400x400 x300mm	16" x 16" X12"	12	(2500m³/h, 1500CFM)	less than 55 dB	250 W

Model 型号	Dimension 尺寸(mm)	Dimension 尺寸 (inch)	Diameter 直径 (inch)	Fan Air Volume 风量	Fan Operation Noise 噪音	Power 功率
Standard	500x500x 300mm	20" x 20" X12	16	(5000m³/h, 3000CFM)	less than 55 dB	250 W

Note: the voltage and frequency can be customized

备注：电压、频率可定制

PRODUCT SPECIFICATIONS

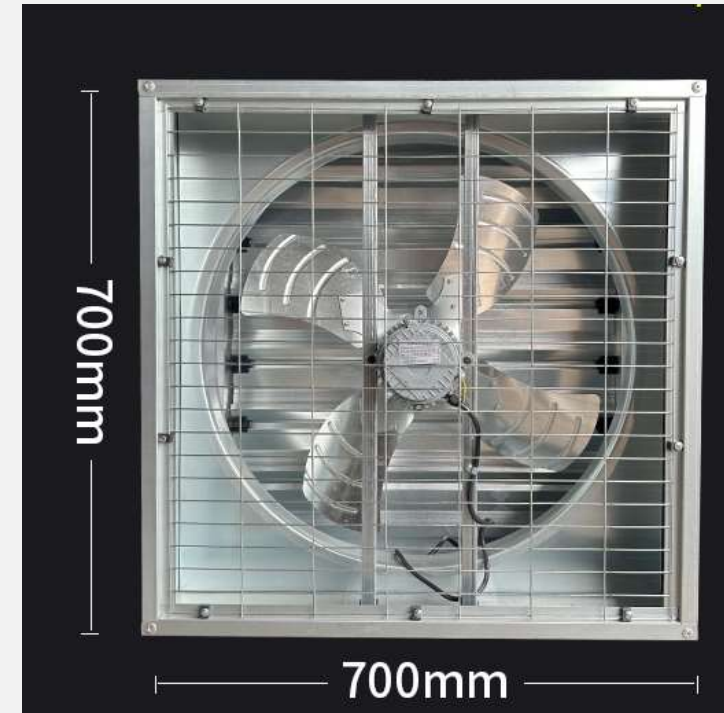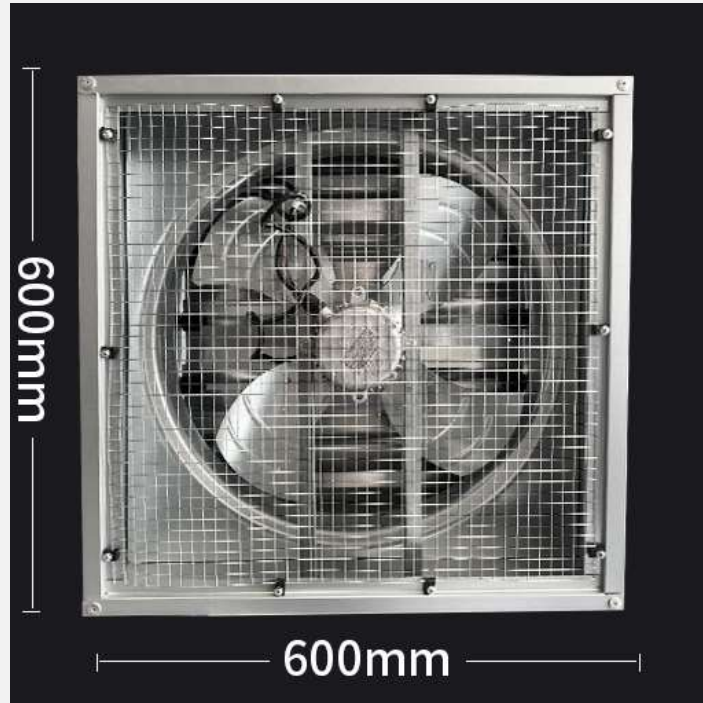

Model 型号	Dimension 尺寸(mm)	Dimension 尺寸 (inch)	Diameter 直径 (inch)	Fan Air Volume 风量	Fan Operation Noise 噪音	Power 功率
Standard	600x600x300mm	24" x 24" X12"	20	(8000m ³ /h, 4700CFM)	less than 55 dB	250 W

Model 型号	Dimension 尺寸(mm)	Dimension 尺寸 (inch)	Diameter 直径 (inch)	Fan Air Volume 风量	Fan Operation Noise 噪音	Power 功率
Standard	700x700x300mm	28" x 28" X12"	24	(10000m ³ /h, 6000CFM)	less than 60 dB	250 W

Note: the voltage and frequency can be customized

备注：电压、频率可定制

PRODUCT SPECIFICATIONS



Model 型号	Dimension 尺寸(mm)	Dimension 尺寸 (inch)	Diameter 直径 (inch)	Fan Air Volume 风量	Fan Operation Noise 噪音	Power 功率
Standard	800x800x300mm/ 0mm/	32" x 32" X12"	26	(13000m³/h, 8000CFM)	less than 60 dB	370 W

Model 型号	Dimension 尺寸(mm)	Dimension 尺寸 (inch)	Diameter 直径 (inch)	Fan Air Volume 风量	Fan Operation Noise 噪音	Power 功率
Standard	800x800x350mm/ 0mm/	32" x 32" X14"	26	(22000m³/h, 13000CFM)	less than 60 dB	370 W

Note: the voltage and frequency can be customized
备注：电压、频率可定制

PRODUCT SPECIFICATIONS



Model 型号	Dimension 尺寸 (mm)	Dimension 尺寸 (inch)	Diameter 直径 (inch)	Fan Air Volume 风量	Fan Operation Noise 噪音	Power 功率
Standard	900x900x350mm	36" x 36" X14 "	31	(27000m ³ /h, 16000CFM)	less than 55 dB	370 W

Model 型号	Dimension 尺寸 (mm)	Dimension 尺寸 (inch)	Diameter 直径 (inch)	Fan Air Volume 风量	Fan Operation Noise 噪音	Power 功率
Standard	1000x1000x350mm	39" x 39" x14"	36	(30000m ³ /h, 17650CFM)	less than 60 dB	550 W

Note: the voltage and frequency can be customized

备注：电压、频率可定制

PRODUCT SPECIFICATIONS



Model 型号	Dimension 尺寸 (mm)	Dimension 尺寸 (inch)	Diameter 直径 (inch)	Fan Air Volume 风量	Fan Operation Noise 噪音	Power 功率
Standard	1060x1060 x400mm	42" x 42" x14"	39	(32000m ³ /h, 19000CFM)	less than 60 dB	550W

Note: the voltage and frequency can be customized

Model 型号	Dimension 尺寸 (mm)	Dimension 尺寸 (inch)	Diameter 直径 (inch)	Fan Air Volume 风量	Fan Operation Noise 噪音	Power 功率
Standard	1100x1100x 400mm	43" x 43" x14"	40	(34000m ³ /h, 20000CFM)	less than 60 dB	550 W

备注：电压、频率可定制

PRODUCT SPECIFICATIONS



Model 型号	Dimension 尺寸(mm)	Dimension 尺寸 (inch)	Diameter 直径 (inch)	Fan Air Volume 风量	Fan Operation Noise 噪音	Power 功率
Standard	1220x1220 x400mm	48" x 48" x14"	44	(37000m ³ /h, 22000CFM)	less than 60 dB	750W

Model 型号	Dimension 尺寸(mm)	Dimension 尺寸 (inch)	Diameter 直径 (inch)	Fan Air Volume 风量	Fan Operation Noise 噪音	Power 功率
Standard	1380x1380 x400mm	54" x 54" x14"	50	(44500m ³ /h, 26000CFM)	less than 65 dB	1100 W

Note: the voltage and frequency can be customized

备注：电压、频率可定制

PRODUCT SPECIFICATIONS



Model 型号	Dimension 尺寸(mm)	Dimension 尺寸 (inch)	Diameter 直径 (inch)	Fan Air Volume 风量	Fan Operation Noise 噪音	Power 功率
Standard	1530x1530x 400mm	60" x 60" x16"	56	(55700m³/h, 32800CFM)	less than 70 dB	1500W



Model 型号	Dimension 尺寸(mm)	Dimension 尺寸 (inch)	Diameter 直径 (inch)	Fan Air Volume 风量	Fan Operation Noise 噪音	Power 功率
Standard	1750x1750 x400mm	68" x 68" x18"	60	(68000m³/h, 40000CFM)	less than 70 dB	1800W

Note: the voltage and frequency can be customized

备注：电压、频率可定制



02-3

Push Pull Exhaust Fan

推拉式负压风机

Push Pull Exhaust Fan

推拉式负压风机

Product Performance Parameter 产品性能参数

Model 型号	Specifi cation 规格	Dimensions 尺寸 (mm)	Blade diameter 风叶尺寸 (mm)	Airflow 风量 (m3/h)	Noise 噪音 (db)	Blade RPM 转速	Input power(w) 输入功率	Rated Voltage(v) 额定电压
MX-P1530	1530	1530x1530x450 mm	1340(55in)	51000	<64	520	1500	380V
MX-P1380	1380	1380x1380x450 mm	1250(50in)	45000	<64	500	1100	380V
MX-P1220	1220	1220x1220x450 mm	1060(50in)	37000	<60	480	750	380V
MX-P1100	1100	1100x1100x450 mm	910(50in)	32500	<60	470	750	380V
MX-P1000	1000	1000x1000x450 mm	810(36in)	24000	<60	458	550	380V



Note: the voltage and frequency can be customized

备注：电压和频率可定制

Direct-Drive Exhaust Fan 直驱式负压风机

Product Performance Parameter 产品性能参数

Model 型号	Specifi cation 规格	Dimensions尺寸 (mm)	Blade diameter 风叶尺寸 (mm)	Airflow 风量 (m3/h)	Noise 噪音 (db)	Blade RPM 转速	Input power(w) 输入功率	Rated Voltage(v) 额定电压
MX-D1530	1530	1530x1530x400 mm	56inch	57000	<65	560	1500	380V
MX-D1380	1380	1380x1380x400 mm	50inch	44500	<65	560	1100	380V
MX-D1220	1220	1220x1220x400 mm	44inch	37000	<60	560	750	380V
MX-D1060	1060	1060x1060x400 mm	39inch	32000	<60	560	550	380V
MX-D900	900	900x900x400mm	30inch	27000	<55	720	370	380V

Note: the voltage and frequency can be customized

备注：电压和频率可定制



Push Pull Exhaust Fan

推拉式负压风机

Features 特点



Thick galvanized sheet
High temperature and pressure
resistance, rust and corrosion
resistance

加厚镀锌板：耐高温、耐压、防锈、
防腐蚀

Strong toughness and rub
resistance
High transmission efficiency
and strong stability

韧性强，耐摩擦
传动效率高，稳定性强




Automatic closed
to protect from
pest, dust and rain

自动关闭，防止害
虫、灰尘和雨水




High-quality wear-
resistant and anti-
aging rubber belt,
long service life

优质耐磨、抗老化皮带，
使用寿命长

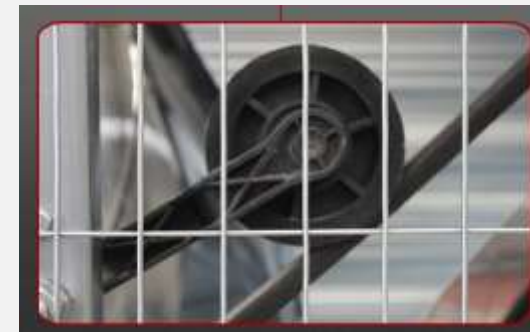

Galvanized sheet
shell, no rust,
corrosion
resistance

镀锌板外壳，不易生锈，
耐腐蚀

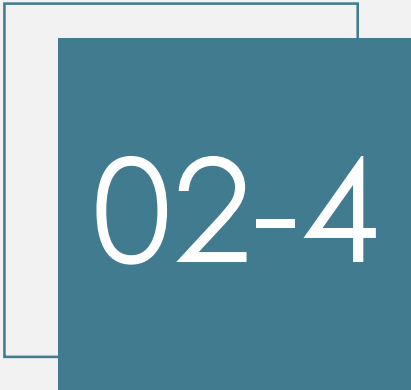

02-4

Butterfly Cone Fan
Shutter Cone Fan

蝴蝶门锥形负压风机

Galvanized Steel Cone Fan

镀锌铁锥形风扇

Product Performance Parameter 产品性能参数

Model 型号	Specific ation 规格	Dimensions 尺寸 (mm)	Blade diameter 风叶直径 (mm)	Airflow 风量 (m3/h)	Noise 噪音 (db)	Blade RPM 风叶转速	Motor RPM 电机转速	Input power 输入功 率 (w)	Rated Voltage(v) 额定电压
MX-GC1380	1380	1380x1380x300mm	1250(50in)	51020	<60	450	1400	1100	380V
MX-GC1220	1220	1220*1220*300mm	1060(44in)	38000	<60	450	1400	750	380V
MX-GC1100	1100	1100x1100x300mm	1060(40in)	36000	<60	450	1400	550	380V
MX-GC1000	1000	1000x1000x300mm	910(36in)	28000	<60	450	1400	550	380V

备注：电压和频率可定制



Butterfly Cone Fan

蝴蝶门锥形负压风机

Features 特点




Fan Blade
easy to deform after one
stamping 一次性冲压成型扇叶易变形；分体的效果更好



Fan Motor
Large power, high
efficiency and
energy-saving

风机电机：大功率，高效节能

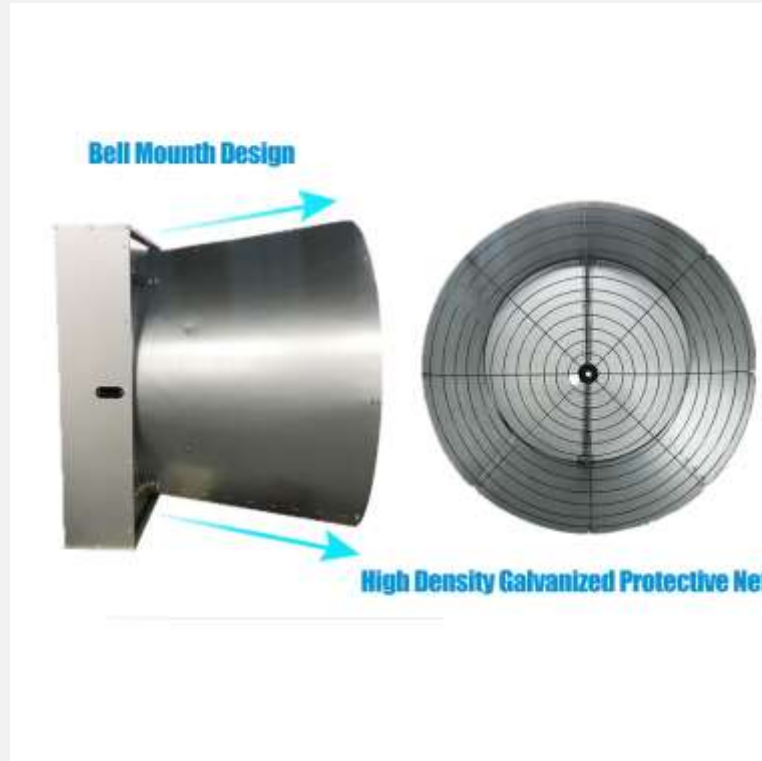

Protective Net
Stability, high
density, long service
life

防护网
稳定性高、密度高、使用寿命长



Aluminum Alloy
Wheel

一体铝轮



Sanlux B belt
Long service life,
maintenance free

三力士B型皮带
使用寿命长，免维护



02.5

Fibreglass Exhaust Fans

玻璃钢负压风机

Fibreglass Exhaust Fans

玻璃钢负压风机



Item No. 型号	Dimensions(mm) 尺寸	Power(W) 功率	Air Flow (m ³ /h) 风量	Voltage/Frequency/phase 电压/频率/相数	Noise 噪音	Rotation Speed 转速	Net Weight 净重
560 #	560*560*450mm 22" x22"x17.5"	250W (4P)	6000m ³ /h 100m ³ /min 3530 CFM	380V+50HZ+3 phase 220V+50HZ+single phase	≤65dB	1400rpm	10 kg
660 #	660*660*450mm 26" x26" x17.5"	370W (4P)	7000m ³ /h 117m ³ /min 4200 CFM	380V+50HZ+3 phase 220V+50HZ+single phase	≤65dB	1400rpm	13 kg
850 #	850x850x480mm 33" x33" x19"	370W (8P)	28000m ³ /h 467m ³ /min 16500CFM	380V+50HZ+3 phase 220V+50HZ+single phase	≤53dB	620rpm	35 kg
1060 #	1060x1060x550mm 42" x42" x22"	550W (10P)	32000m ³ /h 533m ³ /min 19000CFM	380V+50HZ+3 phase 220V+50HZ+single phase	≤55dB	560rpm	45 kg
1260 #	1260x1260x560mm 50" x50" x22"	750W (10P)	37000m ³ /h 620m ³ /min 22000CFM	380V+50HZ+3 phase 220V+50HZ+single phase	≤65dB	560rpm	55 kg
1460 #	1460x1460x580mm 57" x57" x23"	1.1KW (10P)	45000m ³ /h 750m ³ /min 26500CFM	380V+50HZ+3 phase 220V+50HZ+single phase	≤65dB	560rpm	65 kg



02.6

Fiberglass Cone Fan


玻璃钢锥形负压风机

Fiberglass Cone Fan 玻璃钢锥形负压风机

Product Performance Parameter 产品性能参数

Model 型号	24inch	36inch	50inch	54inch
Fan Size (mm)	790*790	1250*1250	1520*1520	1710*1710
Hood Size (mm)	740*740	1170*1170	1470*1470	1660*1660
Voltage	380V	380V	380V	380V
Rated Power	370W	750W	1100W	1500W
Rated Current (A)	1.2	1.6	3.4	3.8
Weight	28KG	53KG	83KG	91KG
Rated Speed(rpm)	860rpm	920rpm	650rpm	650rpm
Air Capacity	16000m³/h	24000m³/h	50000m³/h	64000m³/h
Blade Diameter	580mm	920mm	1290mm	1380mm
Blade	3	3	3	3
Drive Mode	Direct-Drive	Direct-Drive/Belt-Drive	Direct-Drive/Belt-Drive	Belt-Drive
Motor Protection Grade	IP55	IP55	IP55	IP55

Note: the voltage and frequency can be customized

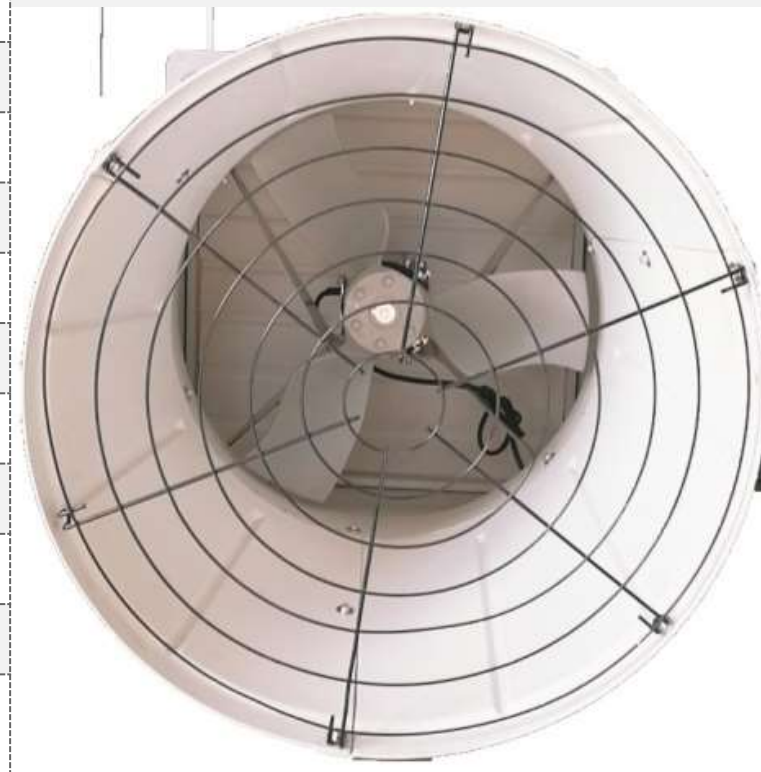

备注：电压和频率可定制

Fiberglass Cone Fan

玻璃钢锥形负压风机

Features 特点



FRP with cone ,
high strength
ventilation,
attractive and
durable

FRP带锥体,
高强度通风,
美观耐用



Large Air Volume, Anti corrosion,
High Speed Ventilation

大风量, 防腐蚀, 高速通风



Stainless steel
support frame, no
rust, stable and
attractive, EASY
installation

不锈钢支架, 不生锈,
稳定美观, 安装简便



The fan blade
was made by
cast aluminum,
Large air flow,
no deformation,
no fracture, no
dust, attractive
appearance
and durable

铝合金扇叶, 风量大, 不变形, 不断裂, 不
积尘, 外形美观, 经久耐用



Low Noise, High
Quality Nylon
Fan Blade, Easy
Installation,
High Strength
Aluminum Alloy

低噪音, 优质
尼龙扇叶, 安
装简便, 高强
度铝合金



1. High strength aluminum-alloy by die-casting.
2. Blast-sanding treatment, eliminate internal stress to improve its own rigidity and stability
3. Attractive appearance

1. 高强度铝合金压铸而成。
2. 喷砂处理, 消除内应力, 提高自身刚性和稳定性。
3. 外观精美

Roof Fan 屋顶风机


Roof Fan Performance Parameter 屋顶风机性能参数

Model # 型号	Blade (pcs) 叶片数	Height(mm) 高	Wide(mm) 高	Airflow (m³/h) 风量	Unit Weight (kg) 每件重量	Base plate (mm) 底座尺寸	Carton packing size/weight/set (mm)/kg 包装尺寸/重量/套数
300 #	20	350	420	1218	1.55	500*500	380*380*140mm/20 kg/ 10 sets
400 #	25	370	530	1650	2.3	500*600	460*460*170mm/28 kg/ 10sets
500 #	25	560	610	2226	3.1	650*1000	510*500*200mm/42 kg/ 10sets
600 #	29	590	680	2952	3.91	800*1000	610*600*200mm/51 kg/ 10sets
800 #	42	690	900	4896	7.67	1000*1000	660*660*180mm/46 kg/5sets



Roof Fan 屋顶风机

Features 特点

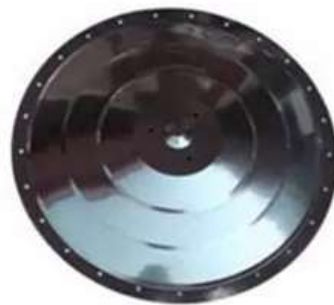

The top cover

顶盖



Steel rim

钢圈



Leaf blade


风叶



The spindle

主轴



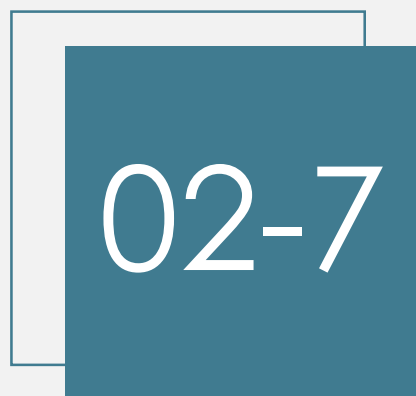

3-Blade Exhaust Fan

3 叶 负压风机

3 Blade Exhaust Fan 尼龙3叶负压风机

Product Performance Parameter 产品性能参数

Model 型号	Specific ation 规格	Dimensions(m m) 尺寸	Blade (pcs) 风叶数	Airflow(m3/h) 风量	Noise (db) 噪音	Blade RPM 转速	Input power(w) 输入功率	Rated Voltage(v) 额定电压
MX-T1380	1380	1380x1380x350m m	3	44500	<65	445	1100	380V

Note: the voltage and frequency can be customized

备注：电压和频率可定制



3 Blade Exhaust Fan

尼龙3叶负压风机

Features 特点





Explosion-Proof Exhaust Fans

防爆负压风机

Explosion-Proof Exhaust Fans

防爆负压风机



Item No. 型号	Dimensions(mm) 尺寸	Power(W) 功率	Air Flow 风量	Voltage/ Frequency 电压/频率	Noise 噪音	Rotation Speed 转速	Net Weight 净重
MX-E400#	400x400x350mm 16" x16" x14"	180W (4P)	2500m ³ /h 1500CFM	220V/50HZ	≤ 65dB	1400rpm	kg
MX-E500#	500x500x350mm 20" x20" x14"	370W (4P)	3000m ³ /h 1800CFM	220V/50HZ	≤ 65dB	1400rpm	kg
MX-E600#	600x600x350mm 24" x24" x14"	550W (4P)	5700m ³ /h 3350CFM	220V/50HZ	≤ 65dB	1400rpm	kg
MX-E700#	700x700x350mm (28" x28" x14"	750W (6P)	8700m ³ /h 5200CFM	220V/50HZ	≤ 65dB	960rpm	kg
MX-E800#	800x800x400mm 31.5" x31.5" x14"	750W (6P)	9500m ³ /h 5600CFM	220V/50HZ	≤ 68dB	960rpm	kg

Explosion-Proof Exhaust Fans

防爆负压风机





Item No. 型号	Dimensions(mm)尺寸	Power(W) 功率	Air Flow 风量	Voltage/ Frequency 电压/频率	Noise 噪音	Rotation Speed 转速	Net Weight 净重
MX-E900 #	900x900x400mm(35" x 35" x14")	370W (4P)	450 m ³ /min (27000m ³ /h, 16000CFM)	380V/50Hz	<55db	620rpm	45kg
MX-E1060 #	1060x1060x400mm(42" x42" x14")	550W (4P)	533 m ³ /min (32000m ³ /h, 19000CFM)	380V/50Hz	<60db	520rpm	50kg
MX-E1220 #	1220x1220x400mm(48" x48" x14")	750W (4P)	616 m ³ /min (37000m ³ /h, 22000CFM)	380V/50Hz	<60db	520rpm	60kg
MX-E1380 #	1380x1380x400mm(54" x54" x14")	1.1KW(4P)	742m ³ /min (44500m ³ /h, 26000CFM)	380V/50Hz	<65db	450rpm	65kg
MX-E1530 #	1530x1530x400mm(60" x60" x14")	1.5KW(4P)	742m ³ /min (57000m ³ /h, 33600CFM)	380V/50Hz	<70db	450rpm	70kg

Explosion-Proof Exhaust Fans

防爆负压风机

Features 特点

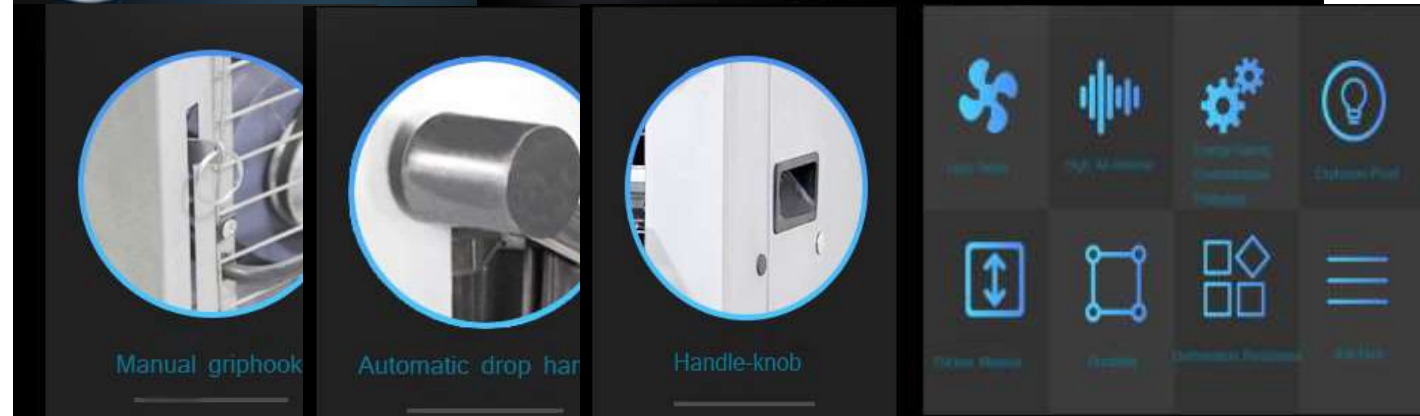

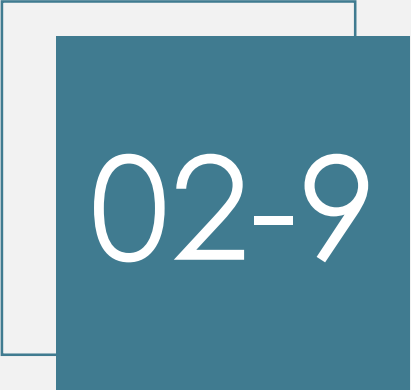

02-9

Fan Filter

风机过滤网

负压风机过滤网



Dimensions and Filters Are Customizable



Air Circulation Fan

圆筒轴流风机

Air Circulation Fan

圆筒轴流负压风机



Model 型号	Diameter(mm) 直径	Power(KW) 功率	Voltage(V) 电压	Rotation(r/min) 转速	Volume(m3/h) 风量	Pressure(Pa) 压力	Noise dB(A) 噪音
4G	400	0.55	220/380	1400	3000~5300	150~100	<71
5G	500	0.75	220/380	1400	4100~8300	235~105	<75
6G	600	1.5	380	1400	8300~16000	310~200	<75
7G	700	3	380	1400	14000~22000	374~137	<70
8G	800	4	380	1400	15666~25000	482~175	<70



Hanging Fan

悬挂式风机

Cowshed stable Hanging fan 牛棚马厩吊扇



Direct-Driven Cow Fans 直驱式牛棚风机								
Model 型号	Dimensions (mm) 尺寸	Blades Diameters(mm) 风叶直径	Blades Speed(rpm) 扇叶速度	Motor Speed(rpm) 电机转速	Airflow(m3/h) 风量	Input Power(w) 输入功率	Total Pressure(Pa) 压力	Noise dB(A) 噪音
MX-H900	900*900*280	750	630	1400	22000	370	65	<65
MX-H1000	1000*1000*280	900	610	1400	25000	750	70	<70
MX-H1100	1100*1100*280	1000	600	1400	32500	750	70	<70
MX-H1220	1220*1220*280	1100	460	1400	38000	750	73	<70
MX-H1380	1380*1380*300	1270	439	1400	44000	1100	56	<70
MX-H1530	1530*1530*340	1400	325	1400	55800	1500	60	<70
Belt-Driven Cow Fans 皮带式牛棚风机								
MX-H900	900*900*280	750	630	1400	22000	370	65	<65
MX-H1000	1000*1000*280	900	610	1400	25000	750	70	<70
MX-H1100	1100*1100*280	1000	600	1400	32500	750	70	<70
MX-H1220	1220*1220*280	1100	460	1400	38000	750	73	<70
MX-H1380	1380*1380*280	1270	439	1400	44000	1100	56	<70
MX-H1530	1530*1530*280	1400	325	1400	55800	1500	60	<70



Greenhouse Anti-Insect Exhaust Fan

温室防虫负压风机

Greenhouse Anti-Insect Exhaust Fan 温室防虫负压风机



Fan Model 型号	Specification 规格	Dimensions(mm) 尺寸	Blade diameter(m) 扇叶直径	Airflow (m³/h) 风量	Noise (db) 噪音	Blade RPM 转速	Input power(w) 输入功率	Rated Voltage(v) 额定电压
MX-A1530	1530	1530x1530x400 mm/450mm	1400(55in)	51000	<64	520	1500	380V
MX-A1380	1380	1380x1380x400 mm/450mm	1270(50in)	45000	<64	500	1100	380V
MX-A1220	1220	1220x1220x400 mm/450mm	1110(50in)	37000	<60	480	750	380V
MX-A1100	1100	1100x1100x400 mm/450mm	1000(50in)	32500	<60	470	750	380V
MX-A1000	1000	1000x1000x400 mm/450mm	890(36in)	24000	<60	458	550	380V

Cooling pad with Exhaust Fan (Water curtain integrated Exhaust fan) 水帘一体负压风机



Fan Model 型号	Dimensions (mm) 尺寸	Blade diameter (mm) 扇叶直径	Airflow (m3/h) 风量	Noise (db) 噪音	Blade RPM 转速	Input power(w) 输入功率	Rated Voltage(v) 额定电压
MX-90	900*1010*1000mm	745	27000	<65	466	370-4	220V/380V
MX-1060	1060*1170*1000mm	910	32000	<65	466	550-4	220V/380V
MX-1220	1220x1330*1000mm	1065	37000	<68	436	750-4	220V/380V
MX-1380	1380*1490*1000mm	1210	44500	<68	413	1100-4	220V/380V
MX-1530	1530*1640*1000mm	1330	55700	<68	413	1500-4	220V/380V
MX-1750	1750*1860*1000mm	1500	68000	<69	413	1800-4	220V/380V







Electronically Commutate
Exhaust fan
Permanent magnet
variable-frequency

变频负压风机
永磁变频风机

Permanent magnet variable-frequency large ceiling fan


永磁变频大吊扇




Model 型号	Diameter (m) 直径	Leaf length width (mm) 风叶长*宽	Building floor height (m) 建筑层高	Speed (rpm) 风速	Power (W) 功率	Airflow(m3/h) 风量	Voltage (V) 电压	Weight(KG) 重量	Covers Radius (M) 覆盖半径	Noise dB(A) 噪音
MX- KP7300	7.3	3400*193	10	58	1800	980000	380 V	95	30	<38
MX- KP6300	6.3	3400*193	10	63	1500	980000	380V	82	26	<38
MX- KP5200	5.2	2400-193	6-8	70	1200	730000	380V	73	20	<38
MX- KP4200	4.2	2400*193	5-6	75	1000	680000	380V	62	17	<38
MX- KP3600	3.6	1700*193	4.5	80	1000	590000	220/380V	56	15	<38
MX- KP3600	3.6	1700*143	4.5	70	800	520000	220/380V	48	12	<38
MX- KP3200	3.2	1500*143	4.5	80	800	480000	220/380V	45	10	<38
MX- KP2700	3.6	1250*143	4.5	80	800	450000	220/380V	42	8	<38

Permanent magnet variable-frequency ceiling/portable fan

永磁变频吊扇/移动扇

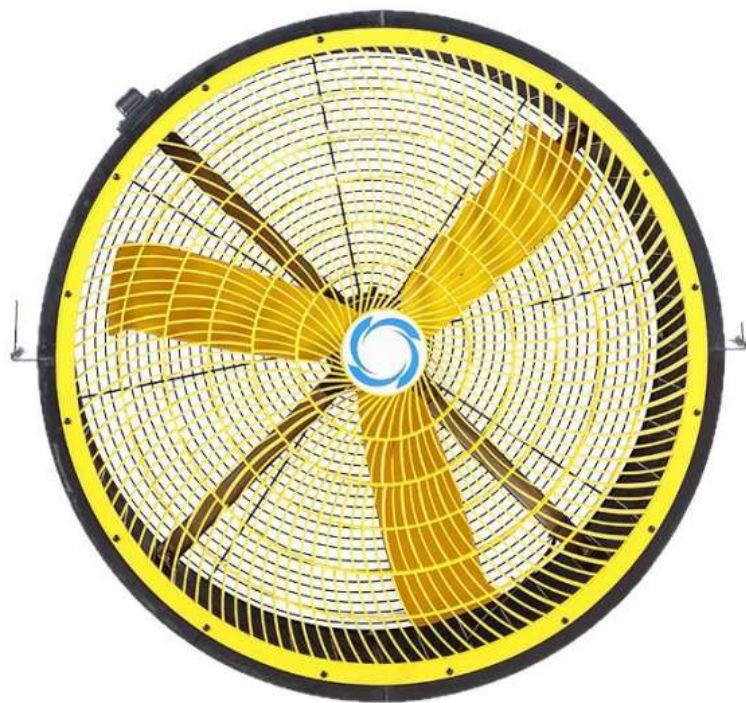

Fan Model 型号	Dimensions(mm) 尺寸	Blade (pcs) 扇叶数	Blade diameter(mm) 扇叶直径	Airflow(m3/h) 风量	Blade RPM 转速	Power(w) 功率	Weight(kg) 重量	Wire Length(m) 电线长度	Air supply distance (M) 送风距离	Rated Voltage(v) 额定电压
MX-S100-G	1000*460*1000mm	3	800	25000	850	450	20	3	25-30	220V
MX-S100	1000*460*1120mm	3	800	25000	850	450	23	3	25-30	220V
MX-S130	1310*710*1440mm	6	1100	35000	500	550	42	3	25-30	220V
MX-S150	1500*760*1690mm	5	1260	42000	460	600	59	5	35-40	220V
MX-S200	1800*800*2000mm	5	1550	56000	400	1100	78	5	35-40	220V

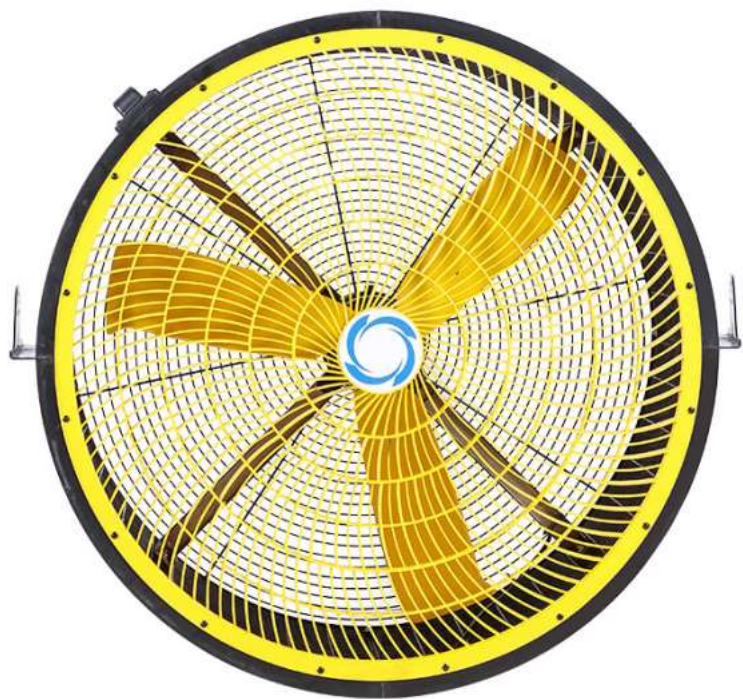

Electronically Commutate Exhaust fan 变频负压风机

Product Performance Parameter 产品性能参数

Model 型号	Specifi cation 规格	Dimensions尺寸 (mm)	Blade diameter 风叶尺寸 (mm)	Airflow 风量 (m3/h)	Noise 噪音 (db)	Blade RPM 转速	Input power(w) 输入功率	Rated Voltage(v) 额定电压
MX-EC1530	1530	1530x1530x450 mm	56inch	57000	<65	560	1500	380V
MX-EC1380	1380	1380x1380x450 mm	50inch	44500	<65	560	1100	220V/380V
MX-EC1220	1220	1220x1220x450 mm	44inch	37000	<60	560	750	220V/380V
MX-EC1060	1060	1060x1060x450 mm	39inch	32000	<60	560	750	220V/380V
MX-EC900	900	900x900x450mm	30inch	27000	<55	720	750	220V/380V





03


Exhaust Fan Features

负压风机特点

EXHAUST FAN FEATURES

负压风机特点

Features 特点

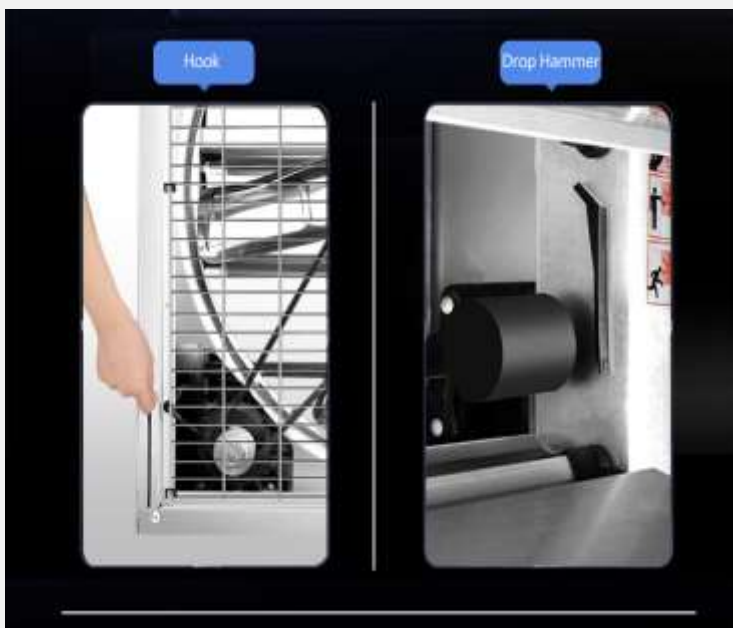

Pulling air in through the grill, and propels out with force by motor, drop hammer design.

落锤式设计。从网格面吸入室内浊气，然后通过电机强力推出室外

Fully Open Fan Louver
百叶可全打开



Seamlessly Closed to Protect from pest, dust and rain

无缝闭合，有效防虫、防尘、防雨

EXHAUST FAN FEATURES

负压风机特点



Split high temperature resistant bearings

分体耐高温轴承



Full copper motor
全铜电机




Cast aluminum alloy pulley system

一体铝轮



Ultra-thick fan blade

超厚扇叶

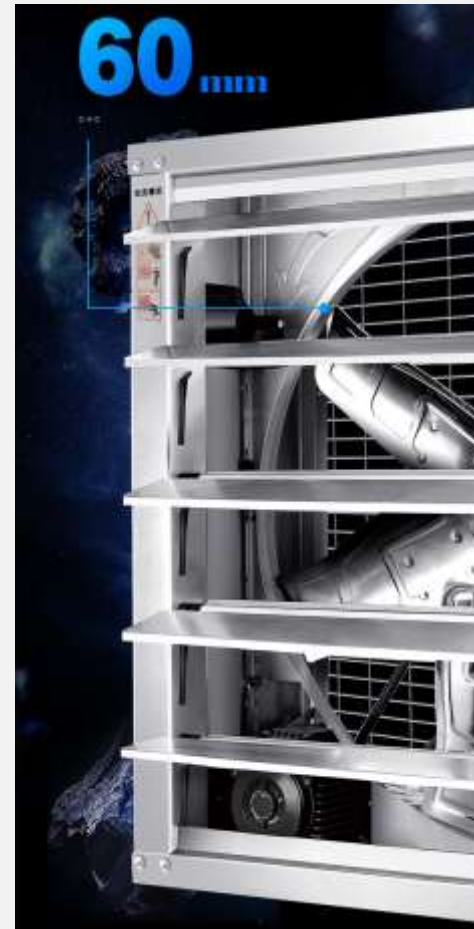

60~100mm blade bracket, higher air flow volume.

60~100mm扇叶支架，风量更大

EXHAUST FAN

负压风机

Exhaust Fan Major Applications 负压风机主要应用场景



factory


warehouse

farm

greenhouse

Best choice for residential and commercial ventilation and cooling, designed for continuous operation for exhausting workshops, barns, poultry houses, greenhouses, garages or anywhere air movement is required

住宅和商业通风和冷却的最佳选择，负压风机专为车间、谷仓、禽舍、畜牧养殖、温室、车库或任何需要通风降温，的连续运行而设计

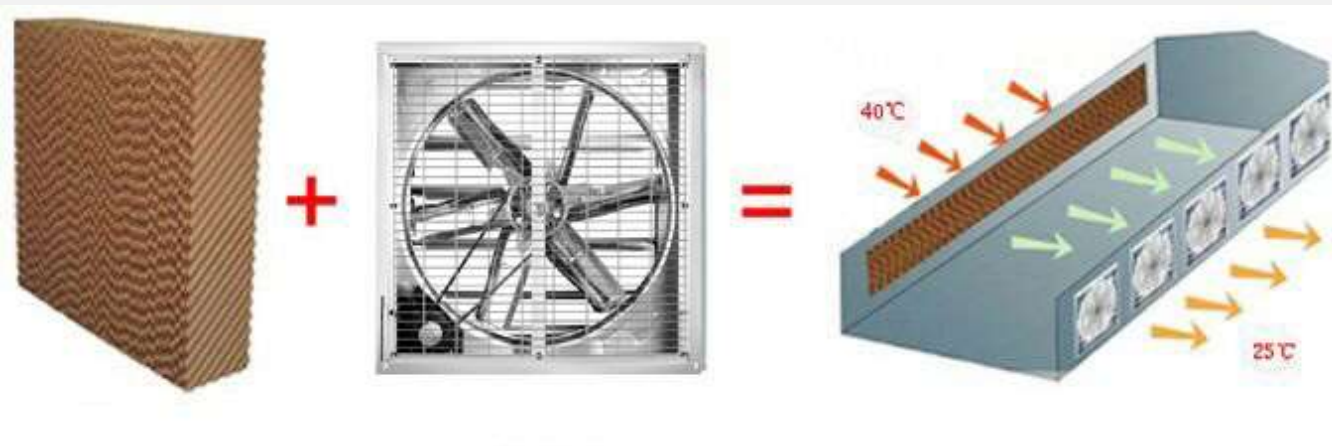

EXHAUST FAN APPLICATIONS

负压风机使用场景



Commercial building ventilation
商业建筑通风



Dairy farm Ventilation
奶牛场通风



Greenhouse Ventilation
温室通风




Poultry farm ventilation
养鸡场通风



Industrial Factory Ventilation
工业工程通风



Swine farm exhaust fan
养猪场通风

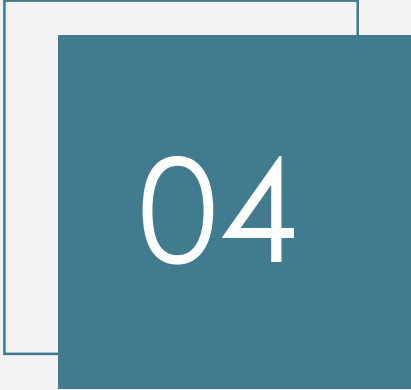

04

Industrial Air Coolers

工业环保空调

EVAPORATIVE AIR COOLER

蒸发式冷却器

Product Introduction 产品介绍

Yihoo is a brand owned by Minxin Industrial, it is specially for evaporative Air Coolers.

Yihoo evaporative air cooler provides cooling, moisturing, ventilation, deodorization and oxygen increasing, it can raise relative humidity to reach about 75%, it also purifies the air.

Comparing with the air-conditioners, Yihoo evaporative air cooler costs 1/3 less, and it takes only 1/8 operating cost to make places stay below 28 centigrades.

Yihoo evaporative air cooler can be used in almost all places where ventilation and cooling is required, such as factories, commercial buildings, restaurants, residential houses, etc.

英禾是敏欣实业旗下品牌，专注于蒸发式冷气机的研发和生产。

英禾蒸发式冷气机兼具降温、保湿、通风、除臭和增氧等功能，可使室内相对湿度达到75%左右，并净化空气。与空调相比，英禾蒸发式冷气机的使用成本仅为空调的三分之一，运行成本仅为空调的八分之一，即可使室内温度保持在28摄氏度以下。

敏欣蒸发式冷气机几乎适用于所有需要通风降温的场所，例如工厂、商业建筑、餐厅、住宅等。

Projects



INDUSTRIAL AIR COOLER (Fixed)

工业环保空调(固定式)



Item No.型号	YiHoo-18	YiHoo-25	YiHoo-30	YiHoo-40
Voltage / Frequency 电压/频率	380V/50Hz	380V/50Hz	380V/50Hz	380V/50Hz
Airflow / 风量	18000(m ³ /h)	25000(m ³ /h)	30000(m ³ /h)	40000(m ³ /h)
Fan type / 类型	Axial / 轴流	Axial / 轴流	Axial / 轴流	Axial / 轴流
Fan Speed Stages 风速调节 (可选)	1-12	1-12	1-12	Single speed / 单速
Power / 功率	1.1KW	1.5KW	3KW	4KW
Dimensions / 尺寸	1120x1120x980mm	1120x1120x1150mm	1260x1260x1200mm	1460x1460x1380mm
Net weight / 净重	50kg	55kg	75kg	100kg
Water storage capacity 水箱容量	30L	40L	50L	50L
Evaporation Capacity 耗水量	25(L/H)	35(L/H)	40(L/H)	45(L/H)
Applicable Space / 覆盖范围	100-150m ²	150-200m ²	200-250m ²	250-300m ²
Airvent direction/ 出风口方向 (可选)	Up/Down/Side (choose 1)	Up/Down/Side (choose 1)	Up/Down (choose 1)	Up/ Down (choose 1)
Materials / 材质	Tough and Rigid PP	Tough and Rigid PP	Tough and Rigid PP	Tough and Rigid PP

Air Cooler Options

固定式环保空调出风口方向（可选）




Upward Airvent 上出风



Downward Airvent 下出风



Side Airvent
侧出风

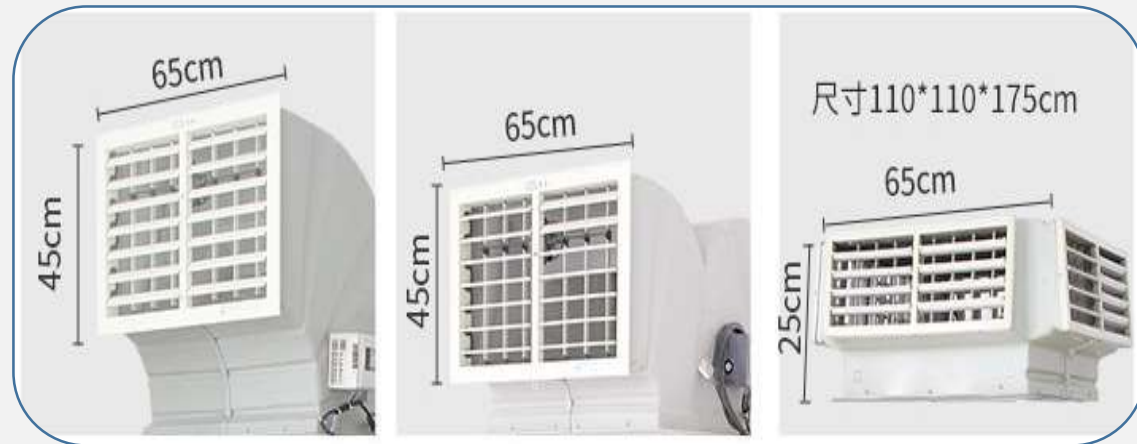

Single Airvent

单面出风

Double Airvent

双面出风

4 Sides Airvent

4面出风



8 Sides Airvent / 8 面出风

INDUSTRIAL AIR COOLER (Portable) 工业环保空调 (移动式)

敏 欣
MINXIN



Item No. / 型号	YH-P18	YH-P25
Voltage/Frequency 电压/频率	220V/50Hz	220V/50Hz
Airflow / 风量	18000(m³/h)	25000(m³/h)
Fan type / 风机类型	Axial	Axial
Fan Speed Stages (Optional) 风速调节 (可选)	1-12	1-12
Power / 功率	1.1KW	1.5KW
Dimensions / 尺寸	1100*1100*1950mm	1100*1100*1950mm
Net weight / 净重	60kg	65kg
Water storage capacity 水箱容量	200L/30L	200L/30L
Evaporation Capacity 耗水量	25(L/H)	25(L/H)
Applicable Space / 覆盖范围	100 m²	200 m²
Materials / 材质	Tough and Rigid PP	Tough and Rigid PP
Voltage / Frequency 电压/频率 (可咨询定制)	220V/50Hz (customizable)	220V/50Hz (customizable)

Number of Airvent (Optional)

出风口数量 (可选)



2 Side Airvent
2 出风口



4 Side Airvent
4 出风口



8 Side Airvent
8 出风口

INDUSTRIAL AIR COOLER



Item No. 型号	YH-P15	YH-P18	YH-P20
Voltage/Frequency 电压/频率	220V/50Hz	220V/50Hz	220V/50Hz
Airflow 风量	15000(m³/h)	18000(m³/h)	20000(m³/h)
Fan type 类型	Axial	Axial	Axial
Fan Speed Stages 风速	3	3	3
Power 功率	0.75KW	1.1KW	1.5KW
Dimensions 尺寸	900*900*1700mm	900*900*1700*mm	900*900*1700m m
Net weight 净重	48kg	48kg	48kg
Water storage capacity 水箱容量	130L	130L	130L
Evaporation Capacity 耗水量	10-15(L/H)	10-15(L/H)	10-15(L/H)
Applicable Space 覆盖面积	60-80 m²	80-100 m²	100-120 m²
Materials 材质	Tough and Rigid PP	Tough and Rigid PP	Tough and Rigid PP

Light Trap


灯陷



Model 型号	Height(mm) 高	Width(mm) 宽	Thickness(mm) 厚度
MX-600#	600	600	267
MX-780#	780	780	267
MX-830#	830	830	267
MX-900#	900	900	267
MX-1000#	1000	1000	267
MX-1100#	1100	1100	267
MX-1220#	1220	1220	267
MX-1380#	1380	1380	267
MX-1530#	1530	1530	267


Light Trap Features

灯陷特点

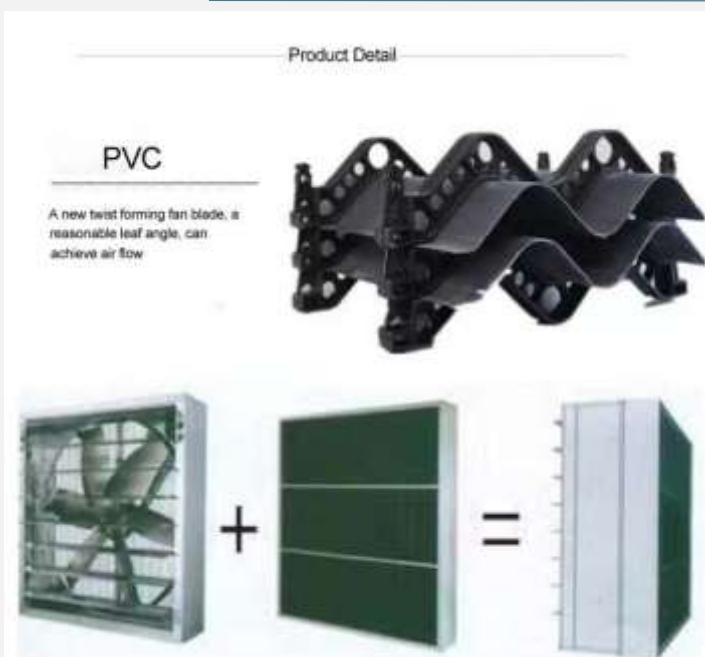

Vanes are connected by fasteners to increase the contact area for more firmness.

叶片通过紧固件连接，以增加接触面积，从而更加牢固。

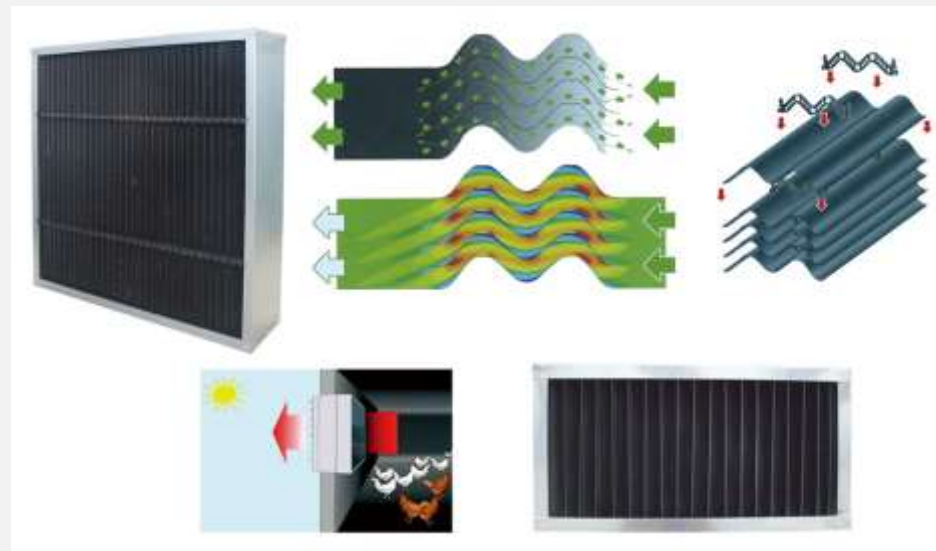

Material:

Non-glare PVC material by extrusion molding

材质：
采用挤压成型的
防眩光 PVC 材料

Vanes:

Width: 222mm

Thickness: 1.1mm/1.0mm

Length: <12m

叶片：
宽度：222 mm
厚度：1.1 /1.0 mm
长度：< 12 m

Lock Fastener:

Material: Copolymer PP

Weight: 42.7g

Height: 30mm

锁扣：
材质：共聚物 PP
重量：42.7 g
高度：30 mm



Cooling Pad (with pump)

冷却垫 (有泵)



Specifications/ Item No. 规格/型号	Customized Length*Height (mm) 定制高度	Thickness (mm) 厚度	Flute Depth (mm) 凹槽深度	$\alpha(^{\circ})$	$\beta(^{\circ})$
7090#	1000 to 2000	100, 150, 200	7	45	45
5090#	1000 to 2000	100, 150	5	45	45
6090#	1000 to 2000	100, 150	6	45	45
7060#	1000 to 2000	150, 200	7	60	60

Cooling Pad (without pump)



冷却垫（无泵）



Thickness of 100, 150mm, 200mm, can be customized according to size requirements

厚度有100、150mm、200mm，可根据尺寸要求定制

Specifications/Item No. 规格/型号	Customized L* W(mm) 定制长*高度	Thickness(mm) 厚度	Flute Depth(mm) 凹槽深度	$\alpha(^{\circ})$	$\beta(^{\circ})$
7090#	1000 to 2000	100, 150, 200	7	45	45
5090#	1000 to 2000	100, 150	5	45	45
6090#	1000 to 2000	100, 150	6	45	45
7060#	1000 to 2000	150, 200	7	60	60

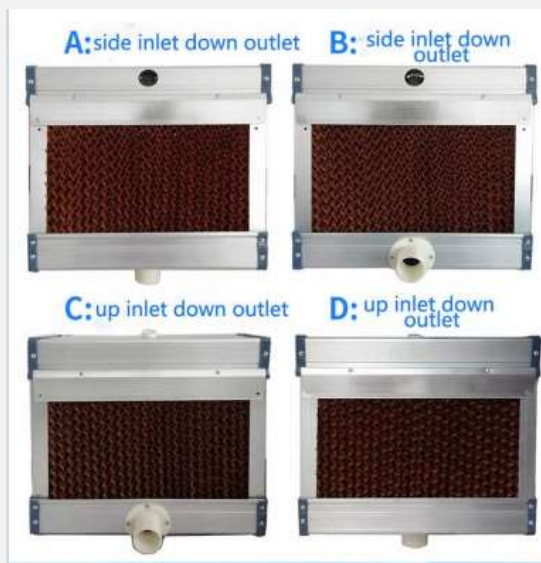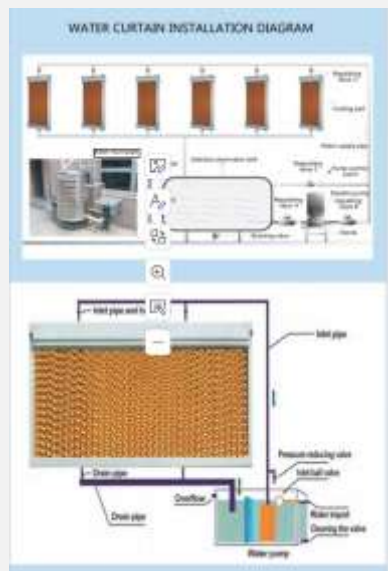

Industrial power saving air conditioning 工业省电空调



Model 型号	Power(KW) 功率	Voltage(V) 电压	APPLICAB LE AREA (m ²) 覆盖面积	Volume(m3/h) 风量	DIMENSION 尺寸	Noise dB(A) 噪音
MXTK-01	4.35	380	150-200 ²	5500	123mm*63mm*195 mm	<70
MXTK-02	5.65	380	200-300 ²	7000	123mm*63mm*195 mm	<75

RAPID REFRIGERATION



AIR CONDITIONING FEATURES

1. 200m² space cooling only needs 4.3 KWH of electricity, only traditional air conditioning 1/2 of the power consumption
2. Large air volume, clean air, refrigeration efficiency is higher.
3. Cold winds blow farther and cover a wider area
4. 1 host can meet 150-200m² cooling demand, applicable Various large places: product exhibition hall, school canteen, restaurant, workshop Factory exhibition exhibition, agriculture and animal husbandry

NEW PANASONIC COMPRESSOR

Some businesses choose second-hand compressors in the second-hand market in order to save costs And we are using well-known big brand Panasonic compressor, after-sales worry-free quality assurance in a lot of functions performance, quality, it's great



- ENERGY SAVING
- RAPID REFRIGERATION
- WASS RUN
- LONG LIFE
- COPPER INNER CORE
- NOT EASILY CORRODED

PURE COPPER MOTOR

The compressor is more reliable and the output is more stable and durable



TEMPERATURE DROP 8-16 DEGREES COOLING AREA OF 200 SQUARE METERS



AIR CONDITIONING 20 METERS

ADJUSTABLE WINDOW WIND DIRECTION

The size of the room temperature depends on the area of the site. It varies in temperature from 50 square to 300 square


The outdoor is as low as 20.2°C Indoor 23°C



ENCRYPTION 5090 WATER CURTAIN PAPER

1. Filter dust
2. Water purification
3. Filter debris
4. Water circulation filtration
5. Debris purification

Multiple filtration, blocking debris pollution, more effective protection of equipment lasting, stable operation Independent design filter, more effective protection of your health.

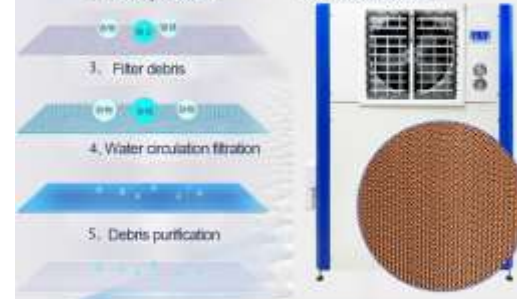

RADIAL SHOCK-PROOF PRECISION PRESSURE GAUGE

Add a pressure indicator to determine if the technique is working properly Easier follow-up maintenance



CONTROL DISPLAY PANEL

- WIND SPEED REGULATION
- SWING PATTERN
- INTELLIGENT REFRIGERATION



MULTI-SCENARIO APPLICATION



• STASH • WORKSHOP • RESTAURANT



• HOSPITAL • OFFICE • SALOON

你想要的我们都有

快速制冷 | 净化控制 | 节能省电 | 一机搞定



水冷式蒸发空调特点。

1. 节能省电, 200m²的空间降温仅需4.3度电, 仅传统空调耗电量的1/2, 无需外接铜管成本更低。
2. 风量大, 净化空气, 制冷速度更快, 制冷效率更高。
3. 送风远, 冷风吹得更远, 覆盖范围更广
4. 制冷快, 快速制冷, 迅速降温
5. 范围广, 1台主机可以满足150-200m²降温需求, 适用各种大型场所: 产品展厅, 学校食堂, 酒楼餐厅, 车间厂房展览展会, 农业畜牧等,

拒绝 二手压缩机 我们采用全新松下压缩机

市面上有些商家为了节省成本在二手市场选用二手的压缩机而我们的蒸发冷省电空调的压缩机, 是采用知名大品牌松下压缩机, 售后无忧品质保证。可拆机检查。在很多功能上, 性能上, 品质上, 我们都是领先绝大多数的省电空调。




- 节能省电
- 快速制冷
- 低音运行
- 寿命长久
- 铜制内芯
- 不易腐蚀



降温8-16度 降温面积达200平方

送风面积大, 轻松解决高温问题

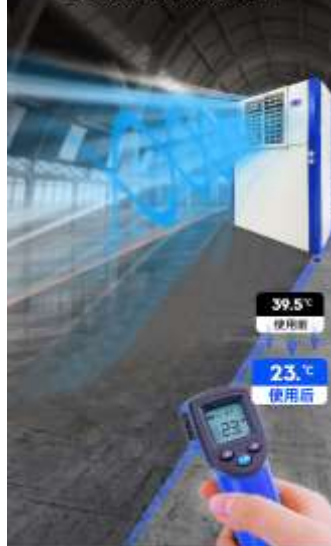

大广角送冷气20米

百叶窗上下左右可调节风向

关于室内温度大小取决于场所面积
由50平方到300平方它的温度都有所差别

出风口低至12.8° 室内温度23°



内置加密5090水帘纸

1. 过滤灰尘



2. 入水净化过滤



3. 内水杂物过滤



4. 水循环过滤



5. 杂物一网净化



多重过滤, 阻隔杂物排污, 更有效的保障设备持久, 稳定运行。独立设计过滤器, 更有效地保护您的健康。



径向耐震 精准测压压力表

侧面增加压力指示表, 便于判断技巧运行正常
后续维护更便捷



强爽冷风 多场景适用

适合工厂车间仓库或大型公共环境, 可以应对通风场所
吹风降温, 室内密封环境全屋降温



● 工厂仓库 ● 工厂车间 ● 餐馆/大排档




● 医院 ● 办公室 ● 酒吧

控制显示面板 不止便捷 还更智能

风速调节 广角摆风 智能制冷



Integrated roof fan 连体屋顶风机

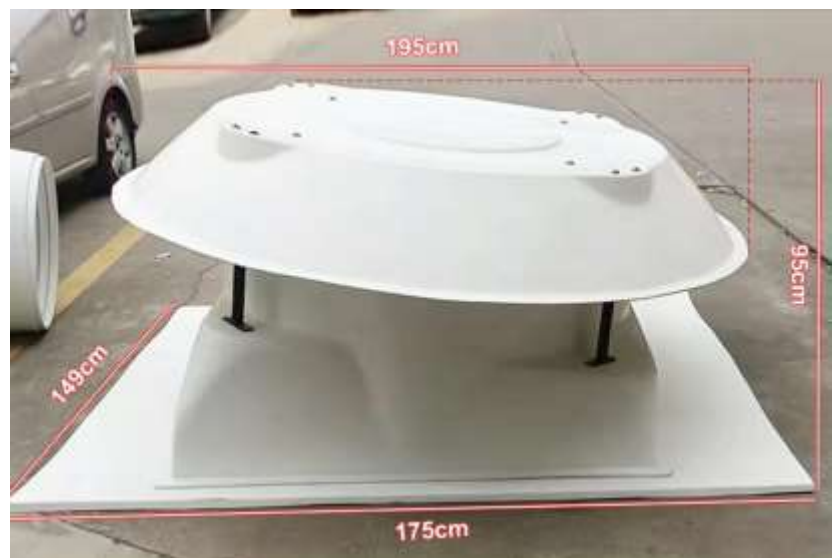

Model 型号	Power (KW) 功率	Voltage(V)) 电压	APPLIC ABLE AREA (m ²) 覆盖面积	Volume(m3/h) 风量	DIMENSION 尺寸	Noise dB(A) 噪音
1060#	0.75	380	50-100 ²	24000	1360mm*1110m m*870mm	<67
1460#	1.1	380	100-150 ²	39000	1750mm*1490m m*950mm	<70

适用场所：工业厂房、腐蚀性场所、大型公共 / 商业建筑、特殊环境：高温、高湿、异味较重的场所

Applicable locations: Industrial buildings, corrosive areas, large public/ commercial buildings, special environments: high-temperature, high-humidity, and heavily odorous areas.

主要功能：高效通风换气、降温散热、防潮防霉、辅助排烟除尘、耐候防护。

Main functions: Efficient ventilation and air exchange, cooling and heat dissipation, moisture prevention and mold prevention, auxiliary smoke exhaust and dust removal, weather resistance protection.

Direct-drive explosion-proof fan直驱式防爆风机



Model 型号	Power(KW) 功率	Voltage(V) 电压	Volume(m3/h) 风量	DIMENSION 尺寸	Noise dB(A) 噪音
90#	0.37	220/380	27000	900mm*900mm *450mm	<55
1060#	0.55	220/380	32000	1060mm*1060 mm*450mm	<60
1220#	0.75	220/380	37000	1220mm*1220 mm*450mm	<60
1380#	1.1	220/380	44500	1380mm*1380 mm*450mm	<65
1530#	1.5	380	57000	1530mm*1530 mm*450mm	<65

适用场所：工业厂房、腐蚀性场所、大型公共 / 商业建筑、特殊环境：高温、高湿、异味较重的场所、粉尘车间、易燃易爆场所。

Application locations: Industrial buildings, corrosive areas, large public/ commercial buildings, special environments: high-temperature, high-humidity, heavily odorous areas, dust workshops, flammable and explosive areas.

主要功能：高效通风换气、降温散热、防潮防霉、辅助排烟除尘。

Main functions: Efficient ventilation and air exchange, cooling and heat dissipation, moisture prevention and mold prevention, and auxiliary smoke exhaust and dust removal.